



**pietra di
matera**



pietra di materata



Met zijn gevarieerde keuze in grootte, dikte en oppervlak biedt Pietra di Matera de mogelijkheid om woonruimtes te creëren met een echt persoonlijke touch.

Avec son choix varié en taille, épaisseur et en surface, Pietra di Matera offre la possibilité de créer des espaces de vie avec une touche vraiment personnelle.

With its diverse choice in size, thickness, and surface, Pietra di Matera offers the opportunity to create living spaces with a truly personal touch.

Pietra di Matera bietet mit seiner vielfältigen Auswahl in Größe, Dicke und Oberfläche die Möglichkeit, Wohnräume mit einer ganz persönlichen Note zu schaffen.

Con la sua ampia scelta di dimensioni, spessori e superfici, Pietra di Matera offre l'opportunità di creare spazi abitativi dal tocco davvero personale.

「**pietra di
matera**」

「**avorio**」

45.3x90.6 cm - 18"x36" inches
60.4x60.4 cm - 24"x24" inches
60.4x60.4x2 cm ≡ - 24"x24"x0.8" inches



pietra di matera avorio

45.3x90.6 cm - 18"x36"x inches

45.3x90.6 cm - 18"x36"x inches | riga



pietra di matera avorio

60.4x60.4 cm - 24"x24" inches
45.3x90.6 cm - 18"x36" inches

「**pietra di
matera**」

「grigio」

45.3x90.6 cm	- 18"x36" inches
60.4x60.4 cm	- 24"x24" inches
60.4x60.4x2 cm	- 24"x24"x0.8" inches
60.4x90.6x2 cm	- 24"x36"x0.8" inches





pietra di matera grigio

45.3x90.6 cm - 18"x36" inches

45.3x90.6 cm - 18"x36" inches | riga

60.4x60.4 cm - 24"x24" inches



pietra di matera grigio

45.3x90.6 cm - 18"x36" inches

pietra di
matera

blu

45.3x90.6 cm	- 18"x36" inches
60.4x60.4 cm	- 24"x24" inches
60.4x60.4x2 cm	⌵ - 24"x24"x0.8" inches
60.4x90.6x2 cm	⌵ - 24"x36"x0.8" inches



pietra di matera blu

45.3x90.6 cm - 18"x36" inches | riga
60.4x60.4 cm - 24"x24" inches



pietra di matera 2cm ✂
60.4x60.4x2 cm - 24"x24"x0.8" inches | avorio






pietra di matera 2cm ✂

60.4x90.6x2 cm - 24"x36"x0.8" inches | grigio



pietra di matera 2cm ✕
60.4x90.6x2 cm - 24"x36"x0.8" inches | blu

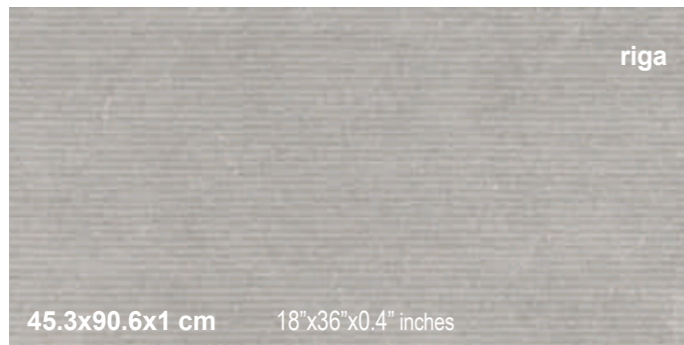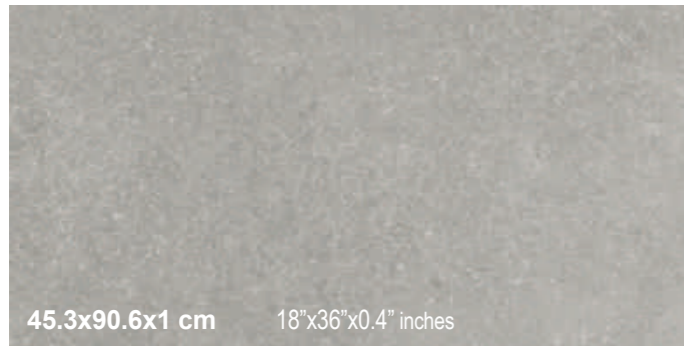

V2
 Licht genuanceerde kleurschakering
 Ton légèrement nuancé
 Slightly different tone
 Leicht unregelmäßig im Farbton
 Leggermente mosso nel tono







2cm  R 11 UGL



「 **pietra di
matera** 」



「 **avorio** 」

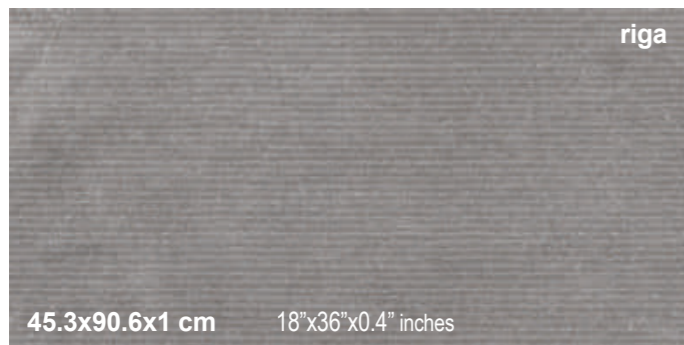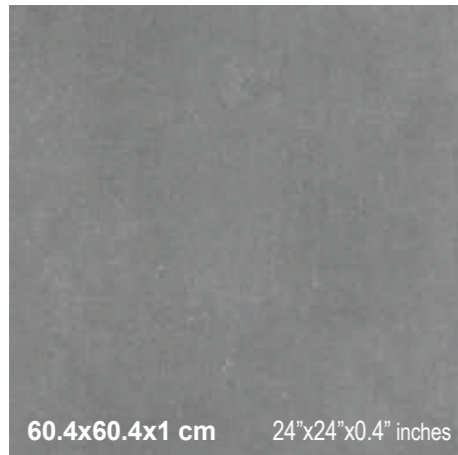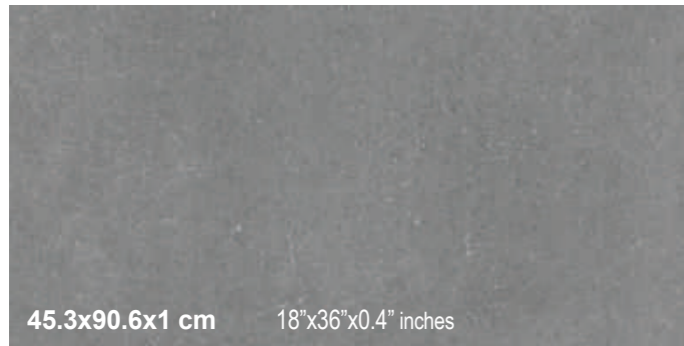

V2
 Licht genuanceerde kleurschakering
 Ton légèrement nuancé
 Slightly different tone
 Leicht unregelmäßig im Farbton
 Leggermente mosso nel tono







2cm R 11 UGL

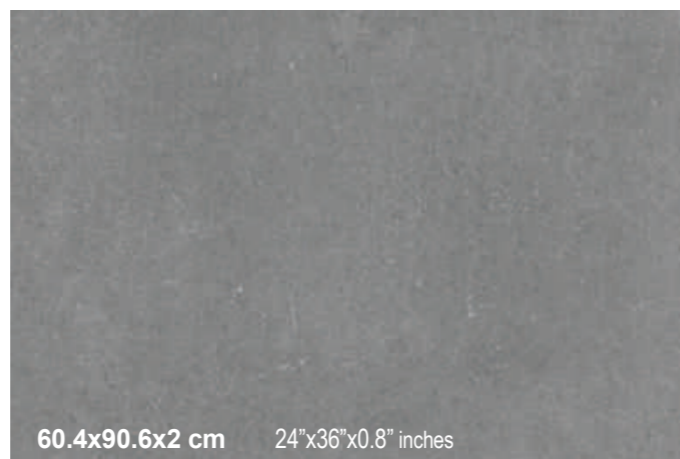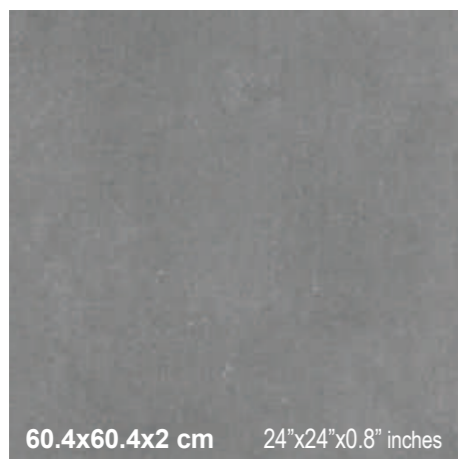

「 pietra di
matera 」



「 grigio 」

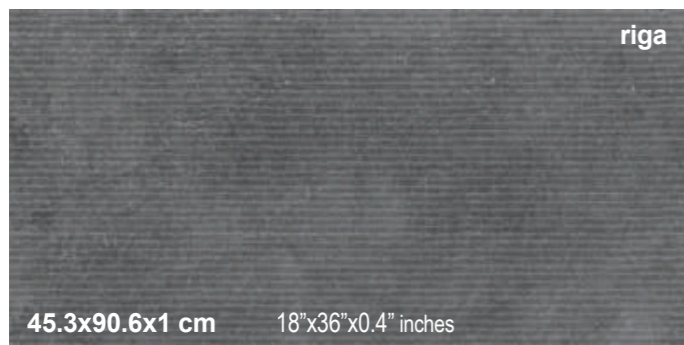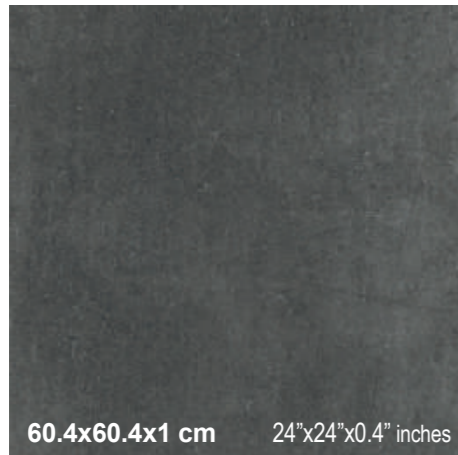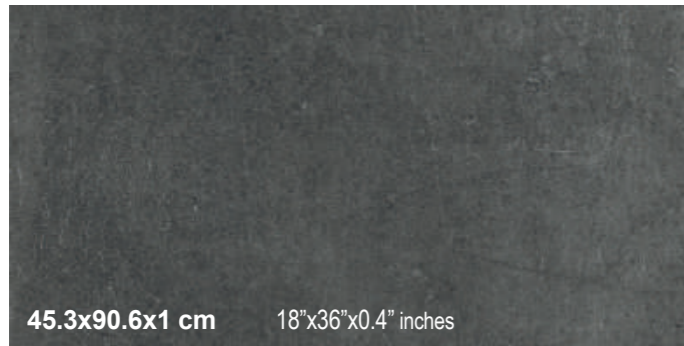

V2
 Licht genuanceerde kleurschakering
 Ton légèrement nuancé
 Slightly different tone
 Leicht unregelmäßig im Farbton
 Leggermente mosso nel tono



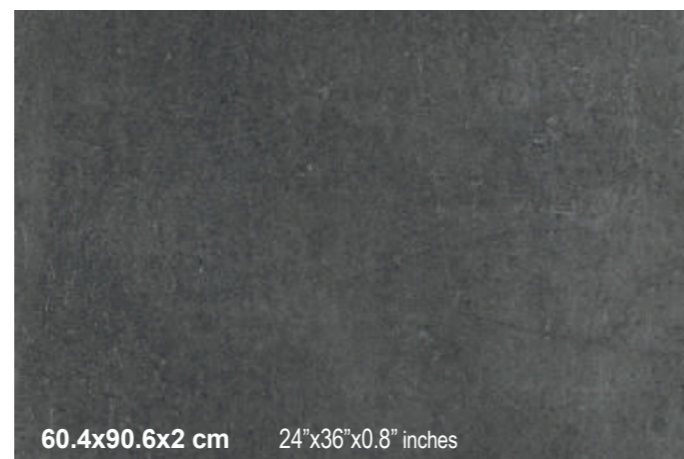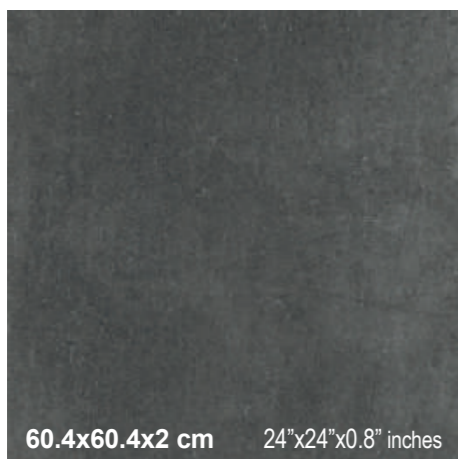






2cm R 11 UGL

















「 **pietra di
matera** 」

「 **blu** 」

pietra di matera

	avorio	grigio	blu	pcs/box	m ² /box	m ² /pallet	kg/m ²
 45.3x90.6x1 cm 18"x36"x0.3" inches rect . R10	TS CFM490	TS CFM491	TS CFM492	3	1,23	39,36	22,4
 45.3x90.6x1 cm 18"x36"x0.3" inches rect . R11 riga	TS CFM490RI	TS CFM491RI	TS CFM492RI	3	1,23	39,36	22,4
 60.4x60.4x1 cm 24"x24"x0.3" inches rect . R 10	TS CFM600	TS CFM601	TS CFM602	4	1,46	43,8	22,4
 60.4x60.4x2 cm 24"x24"x0.8" inches . rect . R 11	TS CFM60X	TS CFM61X	TS CFM62X	2	0,73	23,36	45
 60.4x90.6x2 cm 24"x36"x0.8" inches rect . R11		TS CFM691X	TS CFM692X	1	0,547	26,256	45
Plinten Plinthes Skirtings Sockel Battiscopa							
 8x60.4 cm 3"x24" inches . rect.	TS CFM600P	TS CFM601P	TS CFM602P	18			
 8x90.6 cm 3"x24" inches . rect.	TS CFM490P	TS CFM491P	TS CFM492P	15			

 	Reference Standard:	EN 14411: 2012 Ceramic Floor and Wall Tiles: Definitions, Classification, Characteristics and Marking
	Product Type:	Dry Pressed : G Groupe Bla G
	Touchstones:	PIETRA DI MATERA
	Use:	Internal and External Wall and Floor Tiles

TEST METHODS		STANDARD AND TEST VALUE	DECLARED VALUE	
	Length and Width	ISO 10545-2	±0,6% /±2.0 mm	Compliant
	Deviation of mean thickness from manufacturing thickness		±5%/±0.5 mm	Compliant
	Straightness of the edges		±0,5%/±1.5 mm	Compliant
	Orthogonality		±0,5%/±2.0 mm	Compliant
	Surface Flatness		±0,5%/±2.0 mm	Compliant
	Surface quality (% defect free)		95%	
	Water Absorption	ISO 10545-3	≤ 0.5 %	< 0,1 % (Average values of our last production)
	Breaking strength (N) Thickness	ISO 10545-4	35 /mm2 min.	> 45 N/mm2 (Average values of our last production)
	Bending strength (N/mm ²)		Thickness ≥ 7,5 mm: 1300 N min.	Compliant
	Resistance to deep abrasion (removed Volume/mm ³)	ISO 10545-7	specify PEI test and the number of exceeded cycles	Class 4
	Resistance to thrill	SO 10545-11	Required	Resistant
	Resistance to frost	ISO 10545-12	Required	Resistant
	Chemical resistance (acid and alkali low concentrations)	ISO 10545-13	According to the classification provided by the manufacturer	GLA
	Resistance to chemical attack (domestic use and pool additives)	ISO 10545-13	Min GB	Compliant
	Stain resistance	ISO 10545-14	Class 3 min	Class 5



info@touchstones.eu
www.touchstones.eu